


MONITOR PRODUCTS COMPANY INC



MSC Series Crystals for VCXO Applications MSC1356-01 M MSC1356-02 (Thru-Hole)

SPECIFICATIONS	MSC1356-01	MSC1356-02
Frequency	6.312 MHz	
Holder	MM-49	MM-49 with 3rd (top) lead
Element	AT Fundamental	
Correlation	19 pF	
Drive Level	1.0 μ W	
Oper Temp Range	-40 $^{\circ}$ C ~ 85 $^{\circ}$ C	
Freq Stability over Temp	\pm 30 ppm	
Freq Tolerance @ 25 $^{\circ}$ C	\pm 20 ppm	
Resistance	40 Ω max	
Electrical Requirements	Frequency Changes	
	Load Capacity	10.7 ~ 41.0 pF
	Pullability	340 ppm min, 400 ppm max

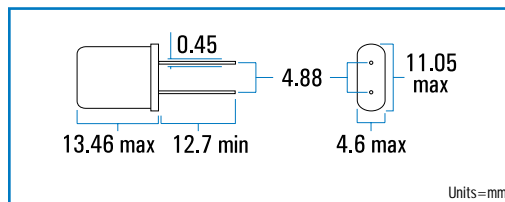

Monitor Products Company Inc reserves the right to make changes to its products and product specifications without notice. No liability is assumed as a result of their use or application. [09-15-99]

Corporate Office & Factory 502 Via del Monte, Oceanside, CA 92054
Tel: 760 433-4510 Fax: 760 434-0255

Regional Sales Office 3415 Custer Road, Suite 117, Plano, TX 75023
Tel: 972 758-8687 Fax: 972 758-7574

MONITOR PRODUCTS COMPANY INC
A BOWTHORPE company



Designers and manufacturers of quality frequency control devices since 1927

www.monitor-products.com